Power Flange Machine | SAFE WORK METHOD STATEMENT (SWMS)

TASK OR ACTIVITY: Power Flange Machine

Business Name: [Company Name]	ABN: [ABN]	SWMS#
Business Address: [Company Address]		
Contact Person:	Phone: [Phone]	Email:

THIS SAFE WORK METHOD STATEMENT IS APPROVED BY THE PCBU OF THE PROJECT

Under the Work Health and Safety Regulation (WHS Regulation), a person conducting a business or undertaking (PCBU) is required to ensure that a safe work method statement (SWMS) is prepared before the proposed work starts.

Full Name:		
Signature:	Title:	Date:

Details of the person(s) responsible for ensuring implementation, monitoring and compliance of the SWMS as well as reviews and modifications of the SWMS.

Full Name:	Title:	Phone:

ALL PERSONNEL PARTICIPATING IN ANY ACTIVITY ON THIS SWMS MUST HAVE THE FOLLOWING COMMUNICATED	NAME AND DATED SIGNATURE OF ALL RELEVANT PERSONNEL WHO HAVE BEEN CONSULTED AND COMMUNICATED TO IN THE DEVELOPMENT AND APPROVAL OF THIS SWMS		
	NAME	SIGNATURE	DATE
Safety meetings or toolbox talks will be scheduled in accordance with legislative requirements to first identify any site hazards, secondly to communicate those hazards and then to further take steps to either eliminate or control each hazard.			
If an incident or a near miss occurs, all work must stop immediately. Depending on the severity of the incident, a meeting will be called with all workers to amend the SWMS if required. The meeting may also be an educational opportunity.			
Any changes made to the SWMS after an incident or a near miss must be approved by the Person Conducting Business or Undertaking and communicated to all relevant personnel.			
The SWMS must be kept and be available for inspection at least until the work is completed. Where a SWMS is revised, all versions should be kept. If a notifiable incident occurs in relation to which the SWMS relates, then the SWMS must be kept for at least two years from the occurrence of the notifiable incident.			

CLIENT OR PRINCIPAL CONTRACTOR DETAILS	
Client:	SCOPE OF WORKS
Project Name:	Provide a detailed description of the specific work being carried out (otherwise known as a scope of works).
Project Address:	
Project Manager:	
Contact Phone:	
Project Manager Signature:	
Date SWMS supplied to Project Manager:	

ANY HIGH-RISK CONSTRUCTION WORK BEING CARRIED OUT	
☐ involves a risk of a person falling more than 2 meters.	☐ is carried out on or near pressurised gas mains or piping.
☐ is carried out on a telecommunication tower.	☐ is carried out on or near chemical, fuel or refrigerant lines.
☐ involves demolition of an element of a structure that is load-be	☐ is carried out on or near energised electrical installations or services.
☐ involves demolition of an element related to the physical integrit of a stru	☐ is carried out in an area that may have a contaminated or flammable atmosphere.
☐ involves, or is likely to involve, disturbing as stos.	☐ involves tilt-up or precast concrete.
☐ involves structural alteration or repair that re mporar upp to prevent collapse.	☐ is carried out on, in or adjacent to a road, railway, shipping lane or other traffic corridor.
☐ is carried out in or near a confined space.	☐ is carried out in an area of a workplace where there is any movement of powered mobile plant.
☐ is carried out in/near a shaft or trench deeper than 1.5m or tunnel involving use of explosives.	☐ is carried out in areas with artificial extremes of temperature.
☐ is carried out in or near water or other liquid that involves a risk of drowning.	☐ involves diving work.

ANY HIGH-RISK MACHINERY OR EQUIPMENT NEARBY							
☐ Forklift	☐ Crane/s	☐ Hoist/s	☐ Excavator	☐ Backhoe/Loader	☐ Boom Lift	☐ EWP	☐ Genie Lift
☐ Trencher	☐ Drilling Rig	☐ Trucks	☐ Formwork	☐ Bobcat	☐ Flammable Gas	☐ Fuel	☐ Dozer
☐ High Voltage	☐ Mulcher	☐ Tilt-up Panels	☐ Roller	☐ Scissor Lift	☐ Tractor	☐ Other -	

RISK MATRIX

LIKELIHOOD	INSIGNIFICANT	MINOR	MODERATE	MAJOR	CATASTROPHIC	SCORE	ACTION
ALMOST CERTAIN	3 HIGH	3 HIGH	4 ACUTE	4 ACUTE	4 ACUTE		
LIKELY	2 MODERATE	3 HIGH	3 HIGH	4 ACUTE	4 ACUTE	4A ACUTE	DO NOT PROCEE
POSSIBLE	1 LOW	2 MODERATE	3 HIGH	4 ACUTE	4 ACUTE	3H HIGH	Review befo work starts.
UNLIKELY	1 LOW	1 LOW	2 MODERATE	3 HIGH	4 ACUTE	2M MODERATE	Ensure control measures in place.
RARE	1 LOW	1 LOW	2 MODERATE	3 HIGH	3 HIGH	1L LOW	nitor and k records

HEIRARCHY OF CONTROLS

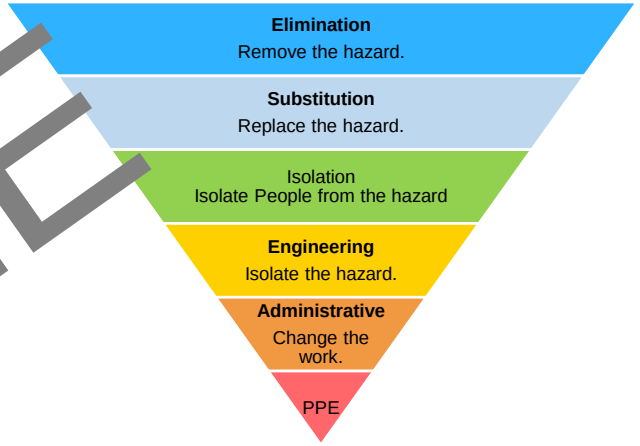

Notes on Hierarchy of Controls: Elimination methods are the most effective and preferre en co lli d hazard. Substitution is the second most effective method of controlling a hazard. Engineering by isolation is the ost e ve, while Administrative Controls by changing the work is the fourth most effective method. PPE (Personal Protective Eq ment) he least effective method.

PERS NAL TECTIVE EQUIPMENT (PPE)

FOOT PROTECTION	HAND PROTECTION	HEAD PROTECTION	HEARING PROTECTION	E PROTE	SPIRATORY PROTECTION	FACE PROTECTION	HIGH-VIS CLOTHING	PROTECTIVE CLOTHING	FALL PROTECTION	SUN PROTECTION	HAIR/JEWELLERY SECURED
											
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

Select the appropriate PPE above suitable for the equipment used or the job task being performed (if applicable).

Note: A SWMS must be reviewed regularly to make sure it remains effective. A SWMS must be reviewed (and revised if necessary) if relevant control measures are revised. The review process should be carried out in consultation with workers (including contractors and subcontractors) who may be affected by the operation of the SWMS and their health and safety representatives who represented that work group at the workplace.

When a SWMS has been revised, the person conducting a business or undertaking must ensure all:

1. persons involved in the work are advised that a revision has been made and how they can access the revised SWMS;
2. persons who will need to change a work procedure or system as a result of the review are advised of the changes in a way that will enable them to implement their duties consistently with the revised SWMS; and,
3. workers that will be involved in the work are provided with the relevant information and instruction that will assist them to understand and implement the revised SWMS.

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
1. Preparation	Inadequate lighting, Incorrect PPE	2M	- Proper lighting: Ensure that adequate lighting is provided in the work area, including temporary lighting if necessary, to allow for clear visibility of all work tasks and potential hazards. - Inspection of lighting: Regularly inspect and maintain all lighting systems to ensure they are functioning correctly and providing sufficient illumination. - PPE training: Provide training to all workers on the appropriate selection, use, storage, and maintenance of required PPE for the specific task. - Correct PPE usage: Enforce the mandatory use of correct PPE, including safety glasses, protective gloves, safety footwear, and earplugs or earmuffs as needed, during the operation of the power flange machine. - Signage and labeling: Display visible signs and labels around the work area, reminding workers to wear the correct PPE and informing them of potential hazards. - PPE inspections: Conduct regular inspections of all PPE, ensuring they are in good working condition and replacing any damaged or worn equipment as necessary. - Housekeeping: Maintain a clean and organised work environment, reducing trip hazards and other issues that could arise due to inadequate lighting. - Pre-start toolbox talks: Conduct briefings prior to work commencement to remind workers about potential hazards, required PPE, and safe work practices specific to the task at hand. - Emergency response planning: Develop and implement an emergency response plan outlining the steps to follow in case of an incident involving inadequate lighting or incorrect PPE use. - PPE availability: Ensure an adequate supply of appropriate PPE is readily available to all workers performing tasks involving the power flange machine. - Supervisor monitoring: Assign a supervisor to closely monitor the work area, ensuring that all workers are utilising proper PPE and following safe work procedures. - Incident reporting and investigation: Establish a system for workers to report any safety concerns related to lighting or PPE use. Investigate reported incidents thoroughly and implement corrective actions to prevent future occurrences.	1L	
2. Set Up Machine	Mechanical hazards, Electrocution	3H	- Ensure that only trained and authorised personnel are allowed to operate the power flange machine, thus minimising the risk of mechanical hazards due to inexperienced handling. - Perform regular maintenance checks on the power flange machine, including inspections for wear and tear, ensuring all bolts and connections are tightened securely, and conducting electrical tests to identify any potential faults or defects.	2M	

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
			- Implement a lockout/tagout procedure for the power flange machine, ensuring it is powered off and disconnected from the main power supply when not in use or during maintenance activities, preventing accidental startup or electrocution. - Familiarise workers with emergency stop procedures and clearly mark the location of emergency stop buttons or switches. - Provide workers with appropriate personal protective equipment (PPE), such as safety glasses, gloves, hearing protection, and steel-toed boots when working with or near the power flange machine. - Properly ground the power flange machine to reduce the risk of electrocution through adequate grounding and bonding techniques. - Make sure that all cables, plugs, and electrical components are in good condition, free of damages or signs of wear, and maintain them regularly to avoid possible electrocution hazards. - Establish a clean and tidy workspace around the power flange machine, ensuring ample space for manoeuvering and keeping the area free of tripping hazards. - Install safety devices such as guards and shields, to cover any moving parts, pinch points, or areas where mechanical hazards may be present, effectively limiting access to these danger zones while the machine is in operation. Implement a Job Safety Analysis (JSA) or similar risk assessment method before starting work with the power flange machine to identify potential hazards and develop strategies for controlling and mitigating risks associated with each specific job. - Ensure proper lighting and visibility in the work area to reduce the likelihood of accidents or incidents related to poor visibility while setting up and operating the power flange machine. - Conduct toolbox talks or safety briefings with workers involved in the operation of the power flange machine, outlining relevant hazards, control measures, and safe working practices to increase awareness and reduce potential risks associated with the equipment. - Always follow the manufacturer's guidelines for machine set up, operation, and maintenance, ensuring adherence to established safety standards and promoting consistent use of safe work procedures throughout the workplace.		
3. Check Flange Alignment	Pinch points, Slipping hazards	2M	- Ensure operators are well-trained in the appropriate use of the Power Flange Machine, including proper inspection and alignment techniques. - Implement a pre-operation checklist that must be completed before any work with the flanges begins. This can help to ensure equipment is safely aligned and minimise the risk of accidents. - Always use personal protective equipment (PPE) suitable for the specific task, such as gloves, safety footwear, and eye protection, to prevent injury from pinch points and slipping hazards.	1L	

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
			- Conduct regular maintenance checks on the Power Flange Machine to ensure its proper functioning. Proper maintenance can reduce the chances of misalignment and other issues. - Keep the working area clean and free of debris to avoid any slipping hazards that may occur while handling the flanges or adjusting the alignment. - Develop and enforce safe operating procedures (SOPs) that include thorough instructions on the correct method for checking flange alignment as well as steps to take if the alignment is found to be incorrect. - Use appropriate tools and support devices like clamps, jacks, or wedges to hold flanges securely in place while aligning and joining them. - Implement a system of communication that allows operators and other personnel to quickly alert each other of any potential hazards, such as misaligned flanges or the sudden release of tension during alignment. - Establish designated walking areas around the Power Flange Machine, ensuring they are kept clear of hazards and providing proper signage to direct workers. - Regularly review and update the SWMS to address any changes in equipment or processes and ensure that all employees are informed of these updates. - Encourage a culture of safety within your workplace, promoting open dialogue between management and employees regarding hazard identification, incident reporting, and suggestions for improving workplace health and safety practices.		
4. Secure Flanges	Falling objects, Caught-in hazards	3H	[redacted]	2M	

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
			[redacted]		
5. Power Up Machine	Electrical shorts, Ear damage from noise	2M	[redacted]	1L	

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
			[redacted]		
6. Start Initial Cut	Flying debris, Contact with moving parts	3H	[redacted]	2M	

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
			[redacted]		
7. Stop Machine for Inspection	Burns, Exposure to coolant	2M	[redacted]	1L	

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
			[redacted]		
8. Make Adjustments	Release of energy, Pinch points	3H	[redacted]	2M	

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
			[redacted]		
9. Resume Cutting	Entanglement, Coolant spills	2M	[redacted]	1L	

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
			[redacted]		
10. Perform Final Cut	Blind spots, Excessive vibration	3H	[redacted]	2M	

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
					

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
11. Power Down Machine	Arc flash, Inadvertent activation		[redacted]	1L	

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
			[redacted]		
12. Remove Machined Flange	Ergonomic strain, Sha[redacted]	[redacted]	[redacted]	2M	

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
			[redacted]		

EMERGENCY RESPONSE – CALL 000 FOR EMERGENCIES

Ensure to have an Emergency Management Plan in place as well as adequate numbers of trained first aid staff with easy access to fully stocked first aid kits, rescue equipment, material safety data sheets, adequate access to emergency communication equipment and fire-fighting equipment suitable for all classes of fire and ignition sources.

LEGISLATIVE REFERENCES

RELEVANT LEGISLATION AND CODES OF PRACTICE. DELETE THE LEGISLATIVE REFERENCES FOR ANY STATE THAT ARE NOT APPLICABLE

Queensland & Australian Capital Territory
Work Health and Safety Act 2011
Work Health and Safety Regulations 2011
Legislation QLD: https://www.worksafe.qld.gov.au/laws-and-compliance/work-health-and-safety-laws
Codes of Practice QLD: https://www.worksafe.qld.gov.au/laws-and-compliance/codes-of-practice
Legislation ACT: https://www.worksafe.act.gov.au/laws-and-compliance/acts-and-regulations
Codes of Practice ACT: https://www.worksafe.act.gov.au/laws-and-compliance/codes-of-practice

New South Wales
Work Health and Safety Act 2011
Work Health and Safety Regulations 2017
Legislation NSW: https://www.safework.nsw.gov.au/legal-obligations/legislation
Codes of Practice NSW: https://www.safework.nsw.gov.au/resource-library/list-of-codes-of-practice

Northern Territory
Work Health and Safety (National Uniform Legislation) Act 2011
Work Health and Safety (National Uniform Legislation) Regulations 2011
Legislation NT: https://worksafe.nt.gov.au/laws-and-compliance/workplace-safety-laws
Codes of Practice NT: https://worksafe.nt.gov.au/forms-and-resources/codes-of-practice

South Australia
Work Health and Safety Act 2012 (SA)
Work Health and Safety Regulations 2012 (SA)
Legislation for SA: https://www.safework.sa.gov.au/resources/legislation
Codes of Practice for SA: https://www.safework.sa.gov.au/workplaces/codes-of-practice#COPs

Tasmania
Work Health and Safety Act 2012
Work Health and Safety (Transitional and Consequential Provisions) Act 2012
Work Health and Safety Regulations 2012
Work Health and Safety (Transitional) Regulations 2012
Legislation for TAS: https://worksafe.tas.gov.au/topics/laws-and-compliance/acts-and-regulations
Codes of Practice for TAS: https://worksafe.tas.gov.au/topics/laws-and-compliance/codes-of-practice

Details of permits, licenses or access required by regulatory bodies (add or delete as required):

- Permits from local council
- Authorisation to commence work
- Any required documents.

Victoria
Occupational Health and Safety Act 2004
Occupational Health and Safety Regulations 2017
Legislation VIC: https://www.worksafe.vic.gov.au/occupational-health-and-safety-act-and-regulations
Codes of Practice VIC: https://www.worksafe.vic.gov.au/compliance-codes-and-codes-practice

Western Australia
Work Health and Safety Act 2020
Work Health and Safety Regulations 2022
Legislation Western Australia: https://www.commerce.wa.gov.au/worksafe/legislation
Codes of Practice WA: https://www.commerce.wa.gov.au/worksafe/codes-practice

Safe Work Australia Links
Law and Regulation (All States): https://www.safeworkaustralia.gov.au/law-and-regulation
Model Codes of Practice: https://www.safeworkaustralia.gov.au/resources-publications/model-codes-of-practice

Model Codes of Practice

- Managing noise and preventing hearing loss at work
- Confined spaces
- Labelling of workplace hazardous chemicals
- Managing risks of hazardous chemicals in the workplace
- Welding processes
- First aid in the workplace
- Managing the risk of falls at workplaces
- Hazardous manual tasks
- Managing the risk of falls in housing construction
- Managing electrical risks in the workplace
- Demolition work
- Excavation work
- Work health and safety consultation, cooperation and coordination
- Managing the work environment and facilities
- How to manage work health and safety risks
- Managing risks of plant in the workplace
- Construction work

SIGNATORIES OF THE SAFE WORK METHOD STATEMENT

The signed and dated personnel listed below have cooperated in the consultation and development of this Safe Work Method Statement which has been approved by the Person/s Conducting a Business or Undertaking (PCBU). In signing this Safe Work Method Statement each individual acknowledges and confirms that they have read this SWMS in full, having raised any questions for items on this Safe Work Method Statement that require clarification, and confirms that they are competent, skilled and knowledgeable for the task assigned to them. Every person acknowledges that they have received the relevant training and qualifications where required, before carrying out any work contained in this Safe Work Method Statement. By signing this Safe Work Method Statement each individual agrees to work safely, to follow any safe work instructions which are provided, and agrees to use all Personal Protective Equipment where appropriate.

Worker Name	Position	Signature	Date	Time	Supervisor
			Date:		
			Date:		
			Date:		
			Date:		
			Date:		
			Date:		
			Date:		

SAFE WORK METHOD STATEMENT MONITORING AND REVIEW

The SWMS must be reviewed regularly to make sure it remains effective and must be reviewed (and revised if necessary) if relevant control measures are changed. The review process should be carried out in consultation with workers (including contractors and subcontractors) who may be affected by the operation of the SWMS and their health and safety representatives who represented that work group at the workplace.

When the SWMS has been revised the PCBU must ensure that all persons involved with the work are advised that a revision has been made and how they can access the revised SWMS, including all persons who will need to change a work procedure or system as a result of the review are advised of the changes in a way that will enable them to implement their duties consistently with the revised SWMS. All workers that will be involved in the work must be provided with the relevant information and instruction that will assist them to understand and implement the revised SWMS.

The SWMS must be monitored regularly for the effectiveness of ensuring hazard controls are effective in reducing the risk of incidents, keeping the workplace safe for all personnel. The person responsible for monitoring the effectiveness of the Safe Work Method Statement should employ a multi-faceted approach which includes but is not limited to:

1. Spot Checks.
2. Consultation with workers, contractors and sub-contractors.
3. Internal audits on a continual basis.

An approach of continuous improvement, promptly recording inconsistencies or deficiencies, followed up by immediate corrective action and consultation with all relevant personnel ensures that the PCBU is consistently developing ever-improving systems of safe work principles.

REVIEW NUMBER	☐ 1	☐ 2	☐ 3	☐ 4	☐ 5	☐ 6	☐ 7
NAME							
INITIALS							
DATE							

SAFE WORK METHOD STATEMENT REVIEW CHECKLIST

This Safe Work Method Statement Review Checklist is to be followed and used upon initial development of the SWMS to help ensure that all steps have been adequately taken before work commences. Think of this document as an internal audit review checklist before commencing work, and may form part of a Toolbox Talk (safety meeting) and may be used as an opportunity for education and training.

ITEMS WHICH MUST BE INCLUDED IN THE SWMS	COMPLETED	TO BE DONE	COMMENTS
The company details have been entered, including the project name and address.	☐	☐	
Names and signatures of all relevant personnel consulted during the development of the SWMS.	☐	☐	
Name, signature, position and date signed of the person approving the SWMS.	☐	☐	
Specific personnel and qualifications, experience is noted in the SWMS.	☐	☐	
Provides a step-by-step process of tasks required to carry out the activity or task.	☐	☐	
Adequate risk assessment of any identified hazards has been completed.	☐	☐	
Foreseeable hazards are identified and documented for each step.	☐	☐	
Any hazards listed in any site risk assessments have been added to the SWM	☐	☐	
SWMS initial risk (IR) column as well as residual risk (RR) columns completed.	☐	☐	
Check control measures added to the SWMS are the most effecti se tions.	☐	☐	
Responsible person is assigned and listed on the SWMS for the im ementa of cont measures.	☐	☐	
Permit requirements specified, such as Hot Wor Electrical Work, W at Heights etc.	☐	☐	
SWMS identifies plant and equipment to be us d.	☐	☐	
Details of inspection checks required for any equipment listed ar noted on the SWMS.	☐	☐	
Describes any mandatory qualifications, experience, training skills required to perform the work.	☐	☐	
Applicable personal protective equipment is selected on the SWMS.	☐	☐	
Lists any required permits or licenses.	☐	☐	
Reflects and documents any legislative references and/or Australian Standards.	☐	☐	
Identifies any hazardous substances used with specific control measures in line with any SDS.	☐	☐	

REVIEWED BY		**DATE REVIEWED**	
SIGNATURE		**DATE COMPLETED**	